

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number  
**WO 2004/009258 A1**

- (51) International Patent Classification<sup>7</sup>: **B08B 7/00**
- (21) International Application Number:  
PCT/GB2003/003248
- (22) International Filing Date: 18 July 2003 (18.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0216949.8 20 July 2002 (20.07.2002) GB
- (71) Applicant (for all designated States except US): **CAR-GLASS LUXEMBOURG SARL-ZUG BRANCH** [CH/CH]; Aegeristrasse 33, CH-6300 Zug (CH).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DAVIES, Christopher** [GB/GB]; Ty Coch Farm, Pembrey Road, Kidwelly, Carmarthenshire SA17 4TF (GB).
- (74) Agent: **DAVIES, Gregory, Mark**; Urquhart-Dykes & Lord, Alexandra House, Alexandra Road, Swansea SA1 5ED (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR REMOVING TARGET MATERIAL FROM A SUBSTRATE

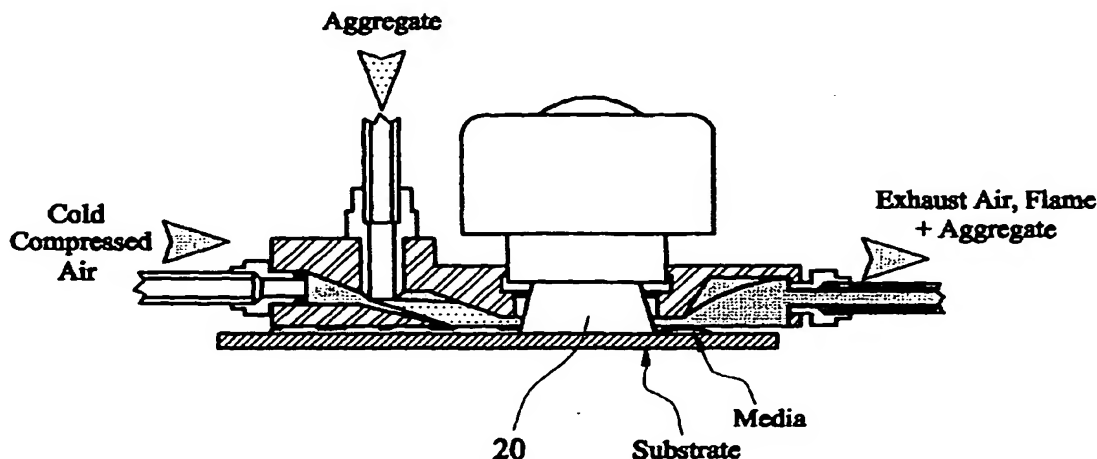

(57) Abstract: A method for removing target material from a substrate, the method comprising directing a supply of particulate material toward a target zone of target material present on the substrate and directing radiant optical energy toward the target zone, the radiant optical energy interacting with the target material and the particulate material promoting removal of target material from the substrate.

-1-

Method and Apparatus for Removing Target Material from a  
Substrate

The present invention relates to a method and apparatus for  
5 removing a target material from a substrate.

In the context of the invention the terms target material  
and substrate should be interpreted broadly, as covering  
removal of a variety of coatings, coverings or marks on a  
10 variety of surfaces. Such coating, coverings or marks may  
be organic or inorganic materials and specifically include  
paints, or other materials present on substrates such as  
masonry, concrete, metallic or textile substrates. The  
invention is particularly directed to amelioration of  
15 graffiti or other substrate scarring (such as verdigris or  
rust) in non-sterile environments such as outdoors or in  
public areas. The invention covers surface treatments  
where the marking or coating is not completely removed but  
at least the substrate appearance is rejuvenated or  
20 improved.

Prior art techniques for removing material from substrates  
using radiant energy are known from, for example US-A-  
6195505, US-A-5789755 and US-A-5328517.

25 An improved technique has now been devised.

According to a first aspect, the present invention provides  
a method for removing target material from a substrate, the  
30 method comprising directing a supply of particulate  
material toward a target zone of the substrate and

-2-

directing radiant optical energy toward the target zone, the radiant optical energy interacting with the target material and the particulate material promoting removal of target material from the substrate.

5

It is preferred that the radiant optical energy is light energy, preferably including wavelengths in the visible range of the spectrum. The light energy may be limited to wavelengths in the visible range of the spectrum.

10

Preferably the light energy is broadband light energy not limited to a single wavelength or narrow wavelength band.

The interaction between the radiant optical energy and the particulate material is beneficially a thermal interaction.

15

Beneficially, the interaction between the radiant optical energy and the target material is a thermal interaction, preferably effecting ablation or pyrolysis of the target material.

20

It is preferred that the interaction between the radiant optical energy and the particulate material results in a blast or shock acting at the target zone, preferably a pressure or gas blast or shock in the region of the target

25

zone.

The interaction between the radiant optical energy and the particulate material beneficially results in the evolution of a gas having properties providing a physical or chemical interaction with material at the target zone. Such a physical interaction may be the pressure blast effect

30

-3-

referred to above. The interaction between the radiant optical energy and the particulate material is beneficially a sublimation interaction, beneficially in which Carbon dioxide is evolved.

5

It is preferred that the particulate material is a material in solid state at ambient temperature. Beneficially the particulate material comprises bicarbonate of soda in particulate form such as in granular or pellet form.

10 Advantageously the particulate material is directed across the target zone in a direction transverse to the direction of the directed radiant optical energy. The particulate material is preferably delivered entrained in a transport gas, the transport gas preferably being pressurised air.

15

The radiant optical energy is desirably delivered as a pulse of optical energy (preferably as a series of pulses).

20

It is preferred that the particulate material is directed to the target zone at times when the radiant optical energy is also directed to the target zone (i.e. contemporaneously). It is preferred that the particulate material is also directed to the target zone when radiant optical energy is not directed to the target zone, preferably including at times subsequent to delivery of  
25 radiant optical energy to the target zone.

30

The radiant optical energy is preferably delivered by a flashlamp delivery system, beneficially wherein the radiant optical energy is delivered in pulse form and/or the energy density of the energy at the target zone is

-4-

substantially in the range  $5\text{J}/\text{cm}^2$  -  $150\text{J}/\text{cm}^2$ .

Beneficially the particulate material and the radiant optical energy is delivered via a combined delivery unit,  
5 which is desirably portable and/or hand held manipulatable.

According to one embodiment, the invention provides a method of removing graffiti or other unwanted material from an architectural or vehicle surface, the method comprising  
10 directing a supply of particulate material toward a target zone of the substrate, the particulate material being in solid phase at ambient temperature, and directing radiant optical energy toward the target zone, the radiant optical energy:

15

- i) interacting with the target material in a thermal interaction resulting in ablation or pyrolysis of at least some of the target material; and,
- 20 ii) interacting with the particulate material in a sublimation reaction evolving a gas having a blast effect at the target zone.

According to a further aspect, the invention provides  
25 apparatus for removing target material from a substrate, the apparatus comprising:

a particulate supply arrangement configured to direct a supply of particulate material toward a target zone  
30 of the substrate; and,

-5-

a radiant optical energy delivery system configured to direct radiant optical energy toward the target zone;

the radiant optical energy interacting with the target material and the particulate material promoting removal of target material from the substrate.

It is preferred that the radiant optical energy delivery system comprises flashlamp system, preferably arranged to deliver non-coherent light including wavelengths in the visible range of the spectrum.

The apparatus is beneficially controlled to limit the pulse rate and/or duration of a light pulse event.

The optical energy delivery system preferably includes a hand-held light delivery unit arranged to be positioned relative to the target zone manually by user.

The apparatus preferably further includes an exhaust arrangement facilitating removal of soot/pyrolysed material and the particulate material.

The apparatus preferably includes means to adjust and/or limit the pulse repetition rate of successive optical pulse event and/or the duration of an optical pulse event, and/or the intensity of the optical energy delivered; and/or the spectrum or spectrum range of the radiant optical energy.

Beneficially the optical energy delivery system includes a manually actuatable trigger for initiating a light pulse

-6-

when the delivery means is positioned to the users satisfaction.

The invention will now be further described in a specific  
5 embodiment by way of example only with reference to the  
accompanying drawings in which:

Figure 1 is a part-sectional view of apparatus for use  
according to the invention in the first stage of operation;

10

Figure 2 is a part-sectional view of the apparatus of  
Figure 1 in a second stage of operation; and

Figure 3 is a part-sectional view of the apparatus of  
15 Figures 1 and 2 in a third stage of operation.

Referring to the drawings, the apparatus 1 comprises a  
portable and manually manipulatable unit 1 comprising a  
support housing 2 for an electrical gas discharge flashlamp  
20 unit 3. Flashlamp unit 3 is mounted through a rear wall of  
housing 2 and has an optical output window 4 presenting  
into a cavity 12 in the forward face of housing 2. The  
unit 1 has port connections 5, 6 leading to a flow path  
network across the housing 2. Connection 5 is for  
25 connection to a particulate aggregate supply (typically a  
supply of bicarbonate of soda pellets or granules).  
Connection 6 is for connection to a source of compressed  
air.

30 The flow path network is defined within and at the forward  
surface of the support housing 2, the network comprising

-7-

conduits 14, 15 leading to a common inclined wedge space 16 which connects with the cavity 12. The network directs compressed air passing via port connection 6, to transport particulate aggregate material passing via port connection 5 across cavity 12 adjacently in front of the light output window 4 of the flashlamp unit 3. The cavity 12 therefore defines a 'target zone' across which the particulate aggregate material is pneumatically conveyed and which is also targeted by the output window 4 of the flashlamp unit 3.

The flow path network in housing 2 is provided with an exhaust plenum 7 downstream of cavity 12 and connecting with exhaust output connection 8 for removal of exhaust air, aggregate and other materials, such as pyrolysis products (as will be described in detail later).

Forward surface portions 9 of the housing 2 are provided to ensure that the light output window 4 of flashlamp unit 3 is spaced (by the depth of cavity 12) from the substrate 10 from which a target covering material 11 is to be removed, for optimum operation.

The arrangement is particularly suited for use in removing graffiti/paint/organic material coverings, coatings or markings from substrates such as brick, metal, or the like. The general operation of the arrangement will be described hereinafter.

In the situation shown in Figure 1, particulate bicarbonate of soda (or other suitable particulate aggregate material)

-8-

is metered via port connection 5 into the cold compressed air stream passing into the flow network of housing 2 via port connection 6. At this point the flashlamp 3 is not active and the particulate aggregate has an abrasive action on the target covering material 11 present on substrate 10 causing loosely adhering target covering material 11 to break away (either inherently or following an earlier light pulse of the flashlamp at an adjacent or the same zone). If the target covering material 11 is soft in consistency, some of the particulate aggregate material (bicarbonate of soda particles) may become embedded in the target covering material 11. The compressed air, particulate aggregate material and any abraded target covering material 11 passes into the exhaust of the system via connection 8.

Referring to Figure 2, the flashlamp unit 3 is next pulsed to produce a flash pulse 20 of radiant optical energy (light) whilst the compressed air and particulate aggregate material stream continues to pass in front of the output window 4 via cavity 12. This causes a rapid heating of coating 11 and thermal decomposition/pyrolysis thereof. Simultaneously, the solid particulate aggregate is heated and rapidly undergoes a sublimation reaction causing rapid evolution of gas at the cavity zone 12 between the output window 4 and substrate 10. This produces a pressure blast effect increasing the pressure in the cavity zone 12 between the window 4 and the substrate 10 which also aids in the exhaust of material via exhaust port 8. A variety of aggregates have been used in proving the present invention. Those aggregates which are in solid form at ambient temperature but rapidly decompose to evolve a gas

-9-

on heating (sublimate) have been found to achieve best results. An example of a material which has been found to be particularly suited for this purpose is bicarbonate of soda. Such material has been repeatedly found to achieve  
5 higher levels of covering media 11 removal and lower levels of residual soot for exhaust. When the flashlamp unit 3 is pulsed the bicarbonate of soda undergoes rapid thermal decomposition producing carbon dioxide gas and water vapour momentarily increasing the pressures under the support  
10 housing 2 and providing some cooling for the substrate. The pressures generated by this interaction often causes the rapid ejection of soot, flame and unused aggregate via the exhaust connection 8. The phenomenon reported is believed also to help to control the oxidisation of the  
15 coating 11 and provide protection for the exposed substrate whilst enhancing the action of the transport compressed air stream in soot removal. The pressure blast also aids in loosening marking material not ablated/pyrolysed by the light flash. Hot vapour and combustion by-products are  
20 carried away from the cavity zone 12 adjacent the flashlamp window 4 by the transport stream of compressed air.

Following pulsing of the lamp, the arrangement operates in the state of operation shown in Figure 3. The compressed  
25 air continues to transport the particulate solid aggregate through the flow network via cavity zone 12 past window 4, but the sublimation phase change of the particulate aggregate does not occur because the light pulse has died away. This enables the particulate aggregate to exhaust in  
30 solid form and aids in removing the residual soot (comprising the pyrolysed remains of coating 11) from the

-10-

substrate 10. It has been found that the soot effectively binds to the particulate aggregate particles exhausting via the exhaust connection 8. This has environmental benefits in disposal of the waste products from the process.

5

Particularly on thick films of coatings such as paint, the action of the flashlamp sometimes causes a softening of the media, allowing the particulate aggregate crystals to become embedded in the coating. On sublimation decomposition under the rapid heating effect of the flashlamp 3, the embedded aggregate particulate acts to further disrupt the integrity of the coating 11 upon thermal decomposition under the influence of the next light flash rupturing from within the thickness of the coating. This causes pronounced disruption and effective removal of the coating. The flow of the aggregate in the transport air stream is effectively constant whilst the flashlamp unit 3 operates in a pulsed regime. The fact that the particulate material is in solid phase at ambient temperature ensures that a particulate not interacted with by the light energy from the flashlamp unit 3 enters the exhaust system (via connection 8) in solid particulate form.

25 The output of the flashlamp unit 3 is non-coherent and non-collimated which results in rapid attenuation of light intensity with distance from the output window 4, such that at a distance of, for example, 10-20cm from the output window 4 the light intensity is of such a low level that it would not damage the skin of a user. However at a distance of up to 5cm or so, the light intensity is at a sufficient

-11-

level to effect the required ablation, thermal pyrolysis or other thermal or physical interaction with the surface sufficient to cause a rejuvenated appearance at the substrate 10 surface by removing sufficient target coating material 11 from the surface.

Beneficially, the light energy delivered during a pulse event of the flashlamp unit 3 will provide energy density at the surface substantially at or in the range 5 - 150 10 joules/cm<sup>2</sup>.

Typically the flashlamp unit 3 includes one or more flashtubes and a reflector to direct the light pulse through window 4. The flashlamp unit 3 may be provided at 15 the end of a flexible umbilical line connecting to a base unit housing a power supply and/or a control unit.

Power supply unit 10 for the apparatus includes a pulse forming network including a capacitor. The voltage dc 20 output is used to charge the capacitor for storage of electrical energy. The capacitor remains charged until an operator or user is ready to use the apparatus. When the operator triggers the optical output, the energy stored in the capacitor is delivered to the flashtubes through a 25 suitable high voltage switch. The electrical energy is converted by the flashtube into optical (light) energy, the duration and intensity of the optical light pulse event being determined by the amount of energy stored in the capacitor and the rate of discharge. The flashtubes of the 30 unit 3 are typically selected to deliver light energy across a wide range of the visible spectrum. Typically,

-12-

output spectrum or spectrum range is controlled and variable dependent upon end user requirements such as paint or substrate colour.

- 5 An embodiment of the present invention has been described above by way of example only. It will be apparent to persons skilled in the art that modifications and variations can be made without departing from the scope and spirit of the invention.

10

## Claims:

1. A method for removing target material from a  
5 substrate, the method comprising directing a supply of  
particulate material toward a target zone of target  
material present on the substrate and directing  
radiant optical energy toward the target zone, the  
radiant optical energy interacting with the target  
10 material and the particulate material promoting  
removal of target material from the substrate.
2. A method according to claim 1, wherein the radiant  
optical energy is light energy.
- 15 3. A method according to claim 2, wherein the light  
energy includes wavelengths in the visible range of  
the spectrum.
- 20 4. A method according to claim 3, wherein the light  
energy is limited to wavelengths in the visible range  
of the spectrum.
5. A method according to any preceding claim, wherein the  
25 interaction between the radiant optical energy and the  
particulate material is a thermal interaction.
6. A method according to any preceding claim, wherein the  
30 interaction between the radiant optical energy and the  
target material is a thermal interaction.

7. A method according to any preceding claim, wherein the interaction between the radiant optical energy and the target material is an interaction effecting ablation or pyrolysis of the target material.
- 5
8. A method according to any preceding claim, wherein the interaction between the radiant optical energy and the particulate material results in a blast or shock medium acting at the target zone.
- 10
9. A method according to any preceding claim, wherein the interaction between the radiant optical energy and the particulate material result in the evolution of a gas having properties providing a physical or chemical interaction with material at the target zone.
- 15
10. A method according to any preceding claim, wherein the interaction between the radiant optical energy and the particulate material is a sublimation interaction.
- 20
11. A method according to any preceding claim in which Carbon dioxide is evolved resultant from the interaction of the radiant optical energy with the particulate material.
- 25
12. A method according to any preceding claim, wherein the particulate material is a material in solid state at ambient temperature.
- 30
13. A method according to any preceding claim, wherein the radiant optical energy is delivered as a pulse of

-15-

optical energy.

5

14. A method according to claim 13, wherein the radiant optical energy is delivered as a series of pulses.

10

15. A method according to any preceding claim, wherein the particulate material is directed across the target zone in a direction transverse to the direction of the directed radiant optical energy.

15

16. A method according to any preceding claim, wherein the particulate material is directed to the target zone at times when the radiant optical energy is also directed to the target zone.

20

17. A method according to claim 16, wherein the particulate material is also directed to the target zone when radiant optical energy is not directed to the target zone.

25

18. A method according to any preceding claim wherein the particulate material comprises bicarbonate of soda in particulate or pellet form.

30

19. A method according to any preceding claim, wherein the particulate material is delivered entrained in a transport gas.
20. A method according to claim 19, wherein the transport gas is pressurised air.

-16-

21. A method according to any preceding claim, wherein the radiant optical energy is delivered by a flashlamp delivery system.
- 5 22. A method according to any preceding claim, wherein the radiant optical energy is delivered in pulse form, the energy density of the energy at the target zone being substantially in the range  $5\text{J}/\text{cm}^2$  -  $150\text{J}/\text{cm}^2$ .
- 10 23. A method according to any preceding claim, wherein the spectrum of the radiant optical energy is variable in a controlled manner.
- 15 24. A method according to any preceding claim, wherein the particulate material and the radiant optical energy is delivered via a combined delivery unit.
- 20 25. A method according to claim 24, wherein the combined delivery unit is portable and/or hand held manipulatable.
- 25 26. A method of removing graffiti or other unwanted material from an architectural or vehicle surface, the method comprising directing a supply of particulate material toward a target zone of the substrate, the particulate material being in solid phase at ambient temperature, and directing radiant optical energy toward the target zone, the radiant optical energy:
- 30 i) interacting with the target material in a thermal interaction resulting in ablation or

-17-

pyrolysis of at least some of the target material; and,

ii) interacting with the particulate material in a sublimation reaction evolving a gas having a blast effect at the target zone.

27. Apparatus for removing target material from a substrate, the apparatus comprising:

a particulate supply arrangement configured to direct a supply of particulate material toward a target zone of the substrate; and,

a radiant optical energy delivery system configured to direct radiant optical energy toward the target zone;

the radiant optical energy interacting with the target material and the particulate material promoting removal of target material from the substrate.

28. Apparatus according to claim 27, wherein the radiant optical energy delivery system comprises flashlamp system.

29. Apparatus according to claim 27 or claim 28, wherein the apparatus is controlled to limit the pulse rate and/or duration of a light pulse event.

-18-

30. Apparatus according to any of claims 27 to 29, wherein the optical energy delivery system includes a hand-held light delivery unit arranged to be positioned relative to the target zone manually by user.

5

31. Apparatus according to any of claims 27 to 30, further including an exhaust arrangement facilitating removal of soot/pyrolysed material and the particulate material.

10

32. Apparatus according to any of claims 27 to 31, wherein the apparatus is controllable to deliver the light energy in the form of a pulse of light (pulse event).

15 33. Apparatus according to claim 32, wherein the apparatus includes means to adjust and/or limit the pulse repetition rate of successive light pulse event and/or the duration of a light pulse event, and/or the intensity of the light delivered; and/or the spectrum  
20 or spectrum range of the radiant optical energy.

34. Apparatus according to any of claims 27 to 33, wherein the optical energy delivery system includes a manually actuatable trigger for initiating a light pulse when  
25 the delivery means is positioned to the users satisfaction.

-1/1-


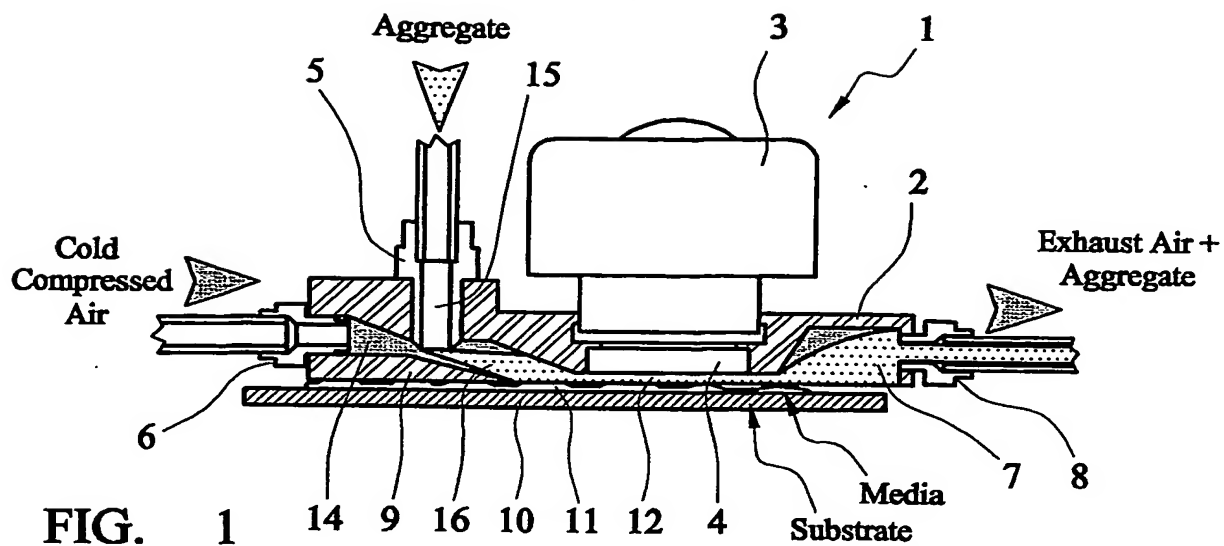


FIG. 1

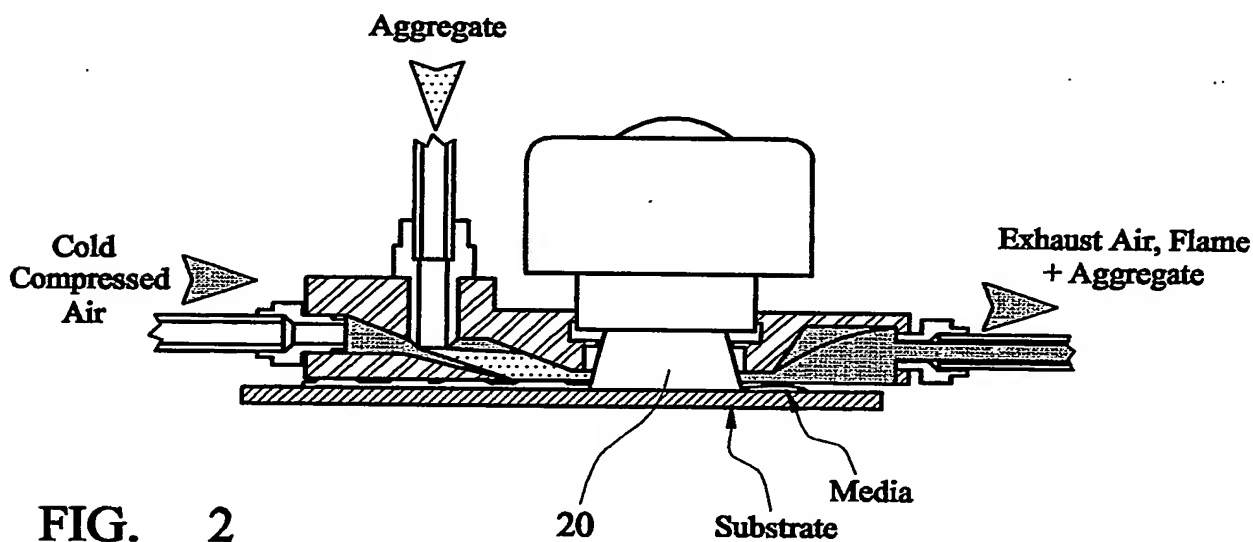

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 03/03248

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B08B7/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	"AIRCRAFT PAINT STRIPPING GOES GREEN" AEROSPACE AMERICA, AMERICAN INSTITUTE OF AERONAUTICS & ASTRONAUTICS. NEW YORK, US, vol. 33, no. 6, 1 June 1995 (1995-06-01), pages 16-17, XP000511657 ISSN: 0740-722X the whole document	1, 6, 27
X	US 6 028 316 A (BENDER JIM) 22 February 2000 (2000-02-22) claims 1, 11, 24, 27	1-3, 6, 27
X	US 6 347 976 B1 (KELLEY JOHN DANIEL ET AL) 19 February 2002 (2002-02-19) column 4-6	1-3, 6, 27
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*8\* document member of the same patent family

Date of the actual completion of the international search

16 October 2003

Date of mailing of the international search report

31/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Devillers, E

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/03248

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 328 517 A (HOOGERWERF JOHN D ET AL) 12 July 1994 (1994-07-12)  claims 1,2,4,11,13,19 -----	1,6,7, 13,14, 19-21,27
X	US 5 782 253 A (HOOGERWERL JOHN D ET AL) 21 July 1998 (1998-07-21) column 3-4 -----	1,6,27

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/03248

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6028316	A	22-02-2000	US 5789755 A	04-08-1998
			AU 720629 B2	08-06-2000
			AU 4236997 A	19-03-1998
			EP 0923418 A1	23-06-1999
			WO 9808626 A1	05-03-1998
US 6347976	B1	19-02-2002	AU 7123301 A	17-09-2001
			BR 0016016 A	25-02-2003
			CA 2393199 A1	13-09-2001
			CN 1414914 T	30-04-2003
			EP 1237734 A2	11-09-2002
			JP 2003525788 T	02-09-2003
			WO 0166365 A2	13-09-2001
US 5328517	A	12-07-1994	CA 2112606 A1	01-07-1995
			AU 3330193 A	28-07-1993
			WO 9312942 A1	08-07-1993
			US 5782253 A	21-07-1998
			US 5613509 A	25-03-1997
US 5782253	A	21-07-1998	US 5328517 A	12-07-1994
			US 5613509 A	25-03-1997
			AU 3330193 A	28-07-1993
			CA 2112606 A1	01-07-1995
			WO 9312942 A1	08-07-1993